


DOKSUN MAKE 48MM DIAMETER 3000MM G.I. EARTHING ROD WITH TERMINATION ASSEMBLY

200MMX75MMX10MM,
G.I. TERMINATION,
CLAMP (OPTIONAL),
WITH 6 NOS.10x30 S.S.
BOLTS AND NUTS

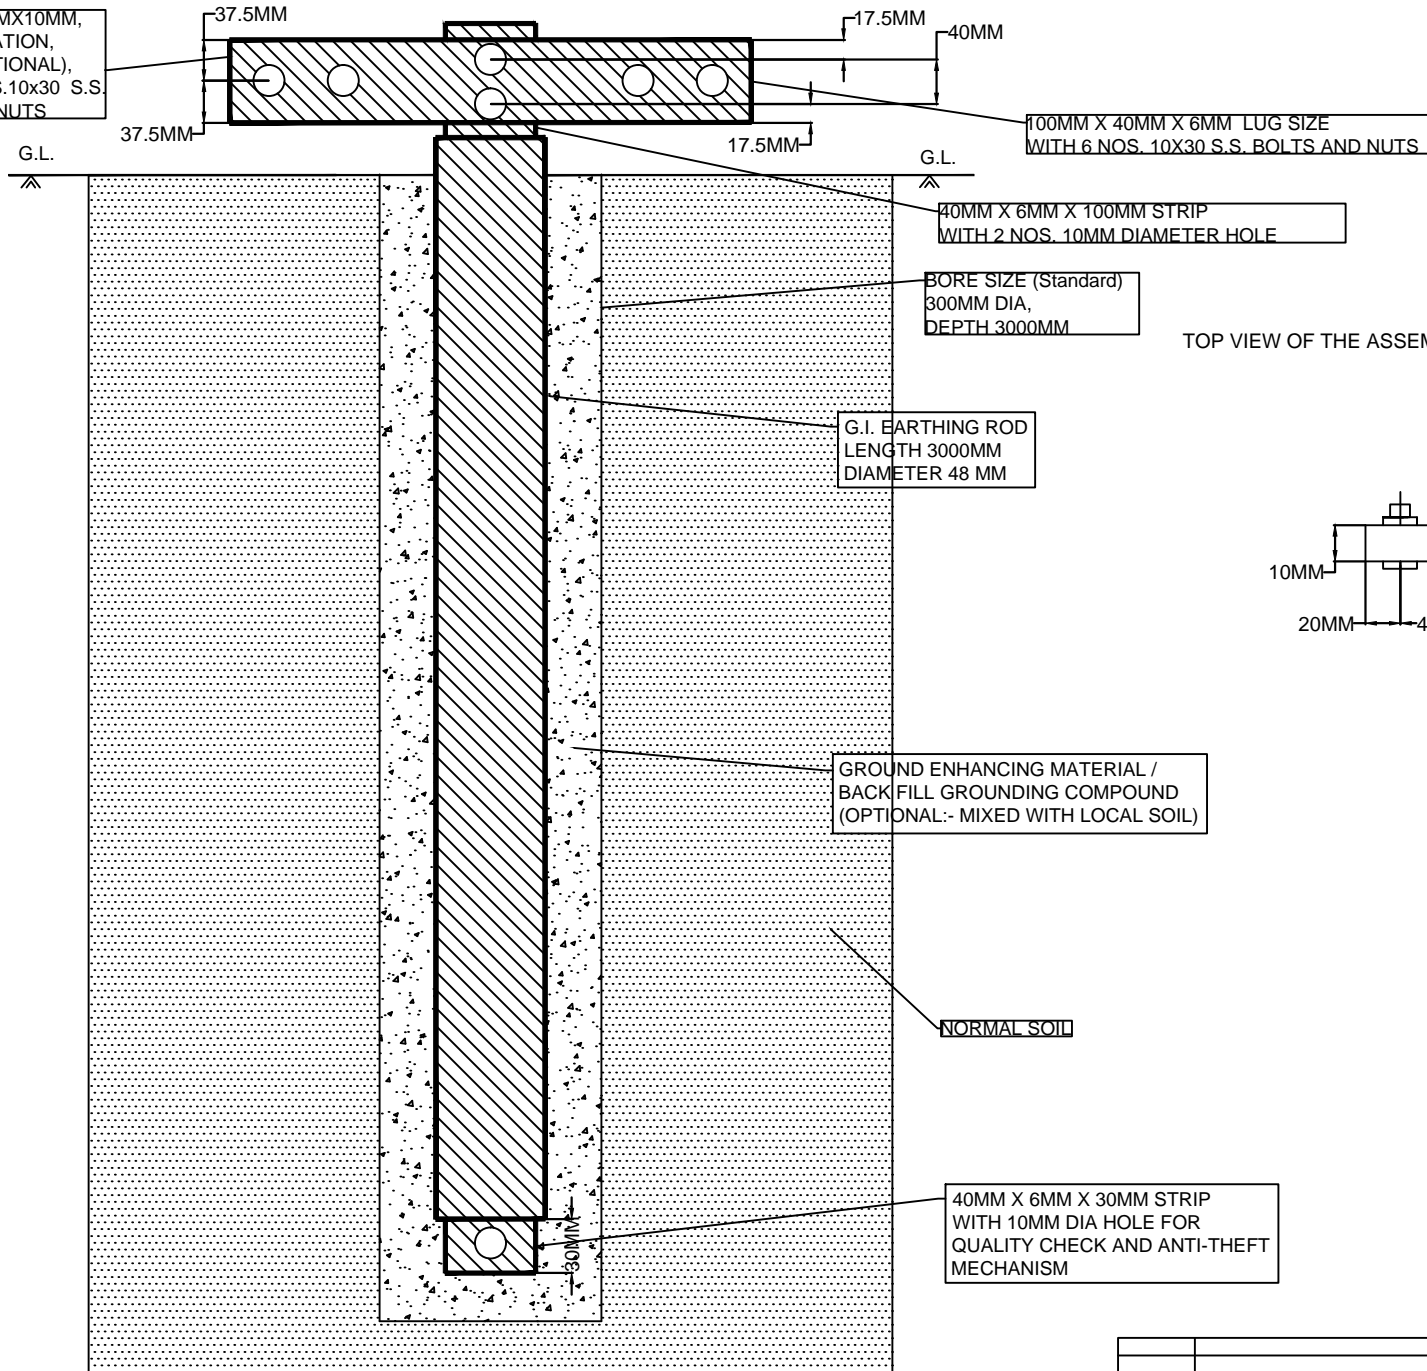

100MM X 40MM X 6MM LUG SIZE
WITH 6 NOS. 10X30 S.S. BOLTS AND NUTS

40MM X 6MM X 100MM STRIP
WITH 2 NOS. 10MM DIAMETER HOLE

BORE SIZE (Standard)
300MM DIA,
DEPTH 3000MM


G.I. EARTHING ROD
LENGTH 3000MM
DIAMETER 48 MM

GROUND ENHANCING MATERIAL /
BACK FILL GROUNDING COMPOUND
(OPTIONAL:- MIXED WITH LOCAL SOIL)

NORMAL SOIL

40MM X 6MM X 30MM STRIP
WITH 10MM DIA HOLE FOR
QUALITY CHECK AND ANTI-THEFT
MECHANISM

TOP VIEW OF THE ASSEMBLY (EARTH ROD AND TERMINATION ACCESSORIES)
(OPTIONAL)

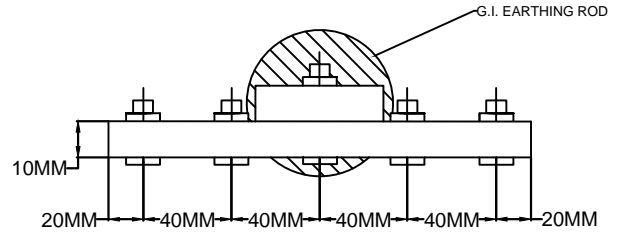

- NOTE:-
1. ALL DIMENSIONS ARE IN MM.
2. GENERAL TOLERANCE : +5% OR -5%

	DOKSUN POWER PRIVATE LTD. GROUND FLOOR, PLOT NO-C/4, REVENUE SURVEY NO.189, GHAEL COMPOUND, B/H NISSAN SHOWROOM, UDHNA MAIN ROAD, SURAT-394210 PH.NO. 7573033007 - 8 - 9			
TITLE	DOKSUN MAKE 48 MM DIAMETER 3000MM G.I. EARTHING ROD			
LOA REF. NO.				
DRAWN : SNEHAL GAMIT	CHECKED : ADITYA DOKANIA	APPD : XXXX	SIZE : -	
SCALE:	DATE:	DRG. NO.:	SHEET:	REV.:
DATE :	DESCRIPTION :	REV.:	XXXXX	26-01-2017
			DPPL/2017/ED/8	XXXX